

ENGLISH




ise

Individuelle Software
und Elektronik GmbH



PRODUCTS

WE MAKE YOUR
HOME SMARTER

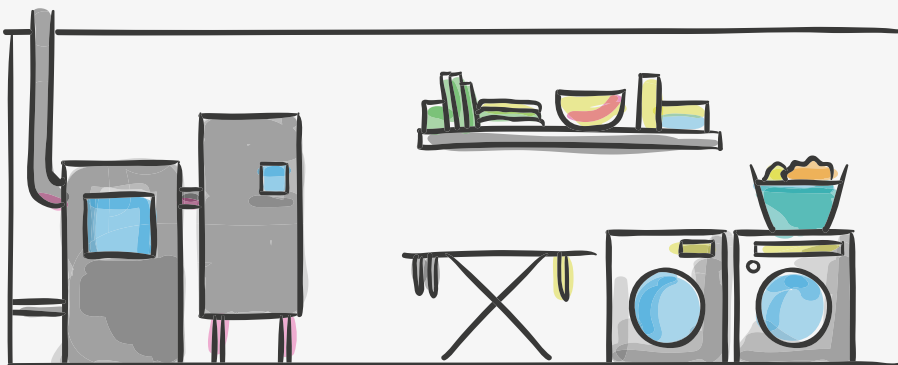

SONOS

hue

berbel

WESCO

Vaillant



Panasonic

Smart buildings need smart ideas.

Every day, we work to ensure that KNX can do more to make smart living spaces even smarter. Our vision is to integrate every device into the building automation with KNX.

This catalogue presents everything about our products, which we have developed with exceptional quality, in-depth know-how and a profound passion for smart living.



SONOS

hue



berbel


WESCO









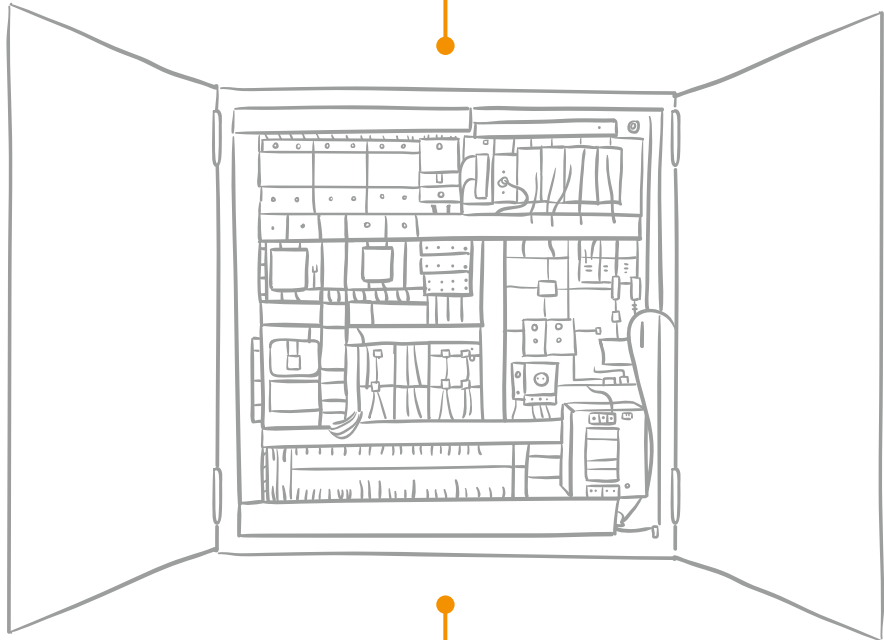




Panasonic



PRODUCT PORTFOLIO 2020

CONTENT



	ISE SMART CONNECT KNX REMOTE ACCESS BE ON THE MOVE YET STILL AT HOME	6
	ISE SMART CONNECT KNX SONOS CAN YOU HEAR IT? SONOS IS ROCKING OUT WITH KNX	12
	ISE SMART CONNECT KNX HUE LIGHT ON, DIMMED OR BRIGHT – NO APP REQUIRED	16
	ISE SMART CONNECT KNX VAILLANT COSY WARM AND EFFICIENT – VAILLANT SNUGGLES UP WITH KNX	20
	ISE SMART CONNECT KNX VIEGA INNOVATIVE SINGLE-ROOM CONTROL – NOW, VIEGA AND KNX TAKE CARE OF THINGS TOGETHER	24
	ISE SMART CONNECT KNX PANASONIC SMART ENTERTAINMENT FOR YOUR HOME WITH PANASONIC AND KNX	26
	ISE SMART APP KNX AXIS KNX NOW HAS EYES	28
	ISE SMART CONNECT KNX E-CHARGE CHARGE CLEVER WITH E-CHARGE	32
	ISE KNX SIB MODUL RF/TP LET THE COOKING SHOW BEGIN	34
	ISE SMART CONNECT KNX PROGRAMMABLE EVERYTHING'S POSSIBLE WITH THE PROGRAMMABLE	36
	POWERED BY PROGRAMMABLE OUR CATEGORY FOR PRODUCTS BASED ON THE ISE SMART CONNECT KNX PROGRAMMABLE	37
	KNX RF USB-STICK ACCESS TO YOUR KNX INSTALLATION SIMPLY VIA RADIO	38
	TEST LIVING IN A KNX HOME EXPERIENCE ISE PRODUCTS LIVE	39
	ISE SMART CONNECT MODBUS VAILLANT EASY ACCESS ON VAILLANT'S GEOTHERM/3 HEAT PUMP	40
	SALES, SUPPORT & CONTACT	42

PAGE


BE ON THE MOVE YET STILL AT HOME

ISE SMART CONNECT KNX REMOTE ACCESS

Teleservicing from anywhere

It has never been so secure and uncomplicated to connect to the KNX system remotely. You can forget about expensive house calls from your system integrator. Desired changes and system maintenance can be carried out quickly and individually, anywhere in the world – even while on the go.

**NOW INCLUDING
DATA LOGGER**

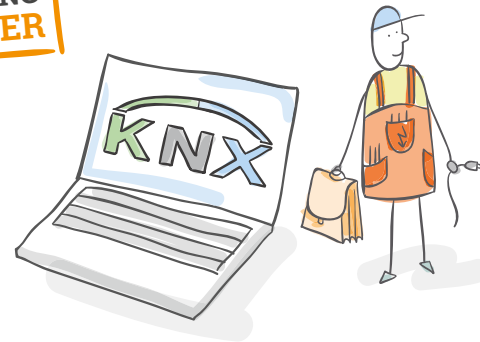


Remote diagnostics anywhere at any time

No visit to the customer, no need to go online when an error occurs. The data logger has the data, you have the solution.



Gira Project Assistant (GPA) and Gira HomeServer 4

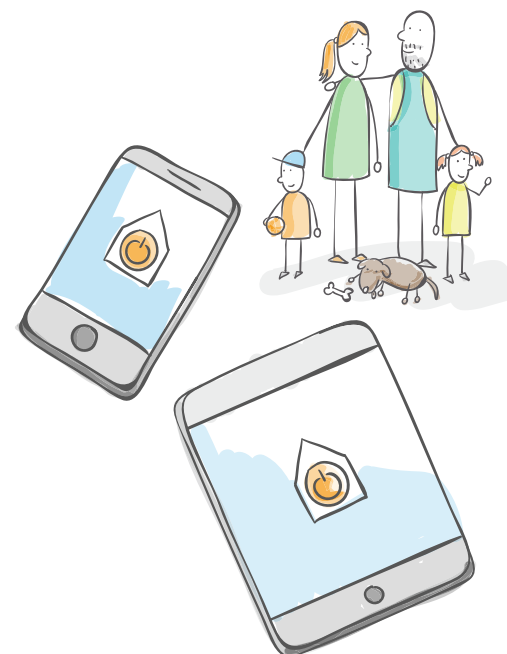

Remote access to your visualisation

You can also access your web-based visualisation remotely, giving you an overview of your building at all times.



Gira X1 App and Gira X1 Server





Important events on your smartphone

Would you like to know whether everything is OK at home? Let your house tell you. You'll receive messages on your smartphone, e.g. when your smoke detector is activated or when someone rings your doorbell. You can decide whether you would like to be informed by telephone call, text message or e-mail. You can also receive images from the camera and values from the KNX (e.g. room temperature).

Our remote access provides support for up to 50 notifications at different danger levels. Is it just someone ringing the doorbell or has the smoke detector gone off? You will receive messages on your smartphone.

Even better: you can configure each trigger for notifications individually based on filters, conditions or hysteresis. For example, you will only receive a notification of temperature when the room temperature drops to a level that you have specified.

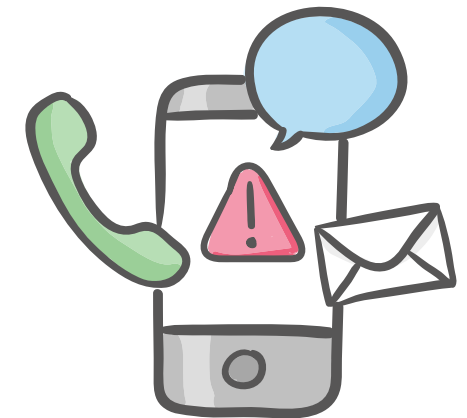

Security

Decide who may access your system with the simple push of a button using our access and user management. Thanks to data transfer encryption, there's no chance of prying eyes.

Not accessible from the Internet?

Is the IP address of your connection not accessible from outside, e.g. a unitymedia (IPv6), an LTE or UMTS connection? No problem. Our solution works here, too. Unpack, connect and you're ready to go.



Secure remote access from anywhere, whether mobile or landline

Unpack, connect and you're ready to go.

Users and electricians profit from the significant advantages of remote access: Easy set-up and secure remote installation and configuration make work considerably easier and save money when it comes to configuration, maintenance and care.

+ POINTS

- + Robust and simple access from everywhere (ETS, GPA, Homeserver, IP devices, camera)
- + Quick setup, no router configuration necessary and no VPN
- + Independent of provider and type of Internet access (IPv6, LTE, etc.)
- + Security through access control and encryption
- + The smart home uses e-mail, SMS or voice message to send information on events
- + Meet customer wishes quicker, no more appointments or journey times
- + No follow-up costs (excluding SMS services)*
- + Convenient remote diagnostics by saving and retrieving telegram recordings with the data logger

ACCESS TO KNX SYSTEMS IN JUST 4 STEPS

1. Insert and connect device:

Simply place on the top-hat rail and connect the KNX IP network and power supply.




2. Register the device on the portal:

Register on the portal www.securedeviceaccess.net with your user data and register the ISE Remote Access with its ID (one-time).



4. Start the ETS, select interface and you're ready to go:

Start your ETS Professional and select a bus connection. You can now work with the ETS as normal, just as if you were there in person.

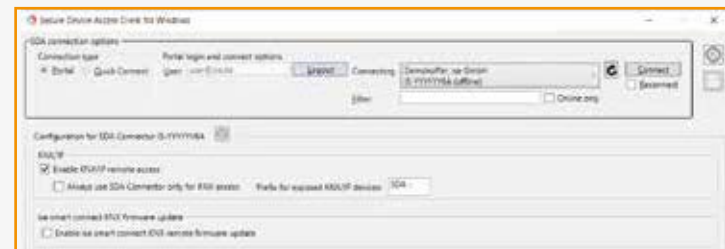

3. Install and start client software for Windows:

Download the SDA Client for Windows from www.ise.de and install it on your PC. Start the client software and enter your user data. Select the registered device and open the connection.



Gira X1 App

FEATURES

- Secure teleservicing and configuration:
 - of KNX installations ETS5
 - via Gira Project Assistant (GPA)
 - via Gira HomeServer Expert
- Secure remote access:
 - to web-based visualisations (HTML)
 - to visualisations with Gira X1 or Gira HomeServer
 - to elements such as cameras, router and printer
- Secure data transfer through encryption
- "KNX Secure Ready" with KNX Secure FDSK key (currently only for gateways that are delivered with firmware 4.0 ex-works)
- Optimised KNX/IP communication for the use of mobile and very slow connections
- Integrated IP interface with up to three tunnel connections (ETS bus or group monitor)
- Access management of users and groups can also be controlled via KNX objects
- Support for 50 notifications (e-mail, SMS*, voice message*, IFTTT)
- Notification triggers can be individually configured (filters, conditions, hysteresis)
- Time server to send time and date on the bus at configurable intervals
- Convenient remote diagnostics by saving and retrieving telegram recordings with the data logger
- Integrated Ethernet switch with two RJ45 sockets
- 2 GB data volume per month
- Unlimited usage duration and 5 years guaranteed server operation
- Portal server is located in Germany and is subject to the German Data Protection Law
- Extensions via firmware updates

TECHNICAL DATA

Rated voltage:	DC 24 V bis 30 V
Power consumption:	2 W
IP communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
Connections:	2x RJ45 (integrated switch) Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

Note: Supply via external DC 24 V. For ETS5 or higher. MicroSD card not included.

*Chargeable additional service sms77 or Messagebird.

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE



Ordering info:

Item number: 1-0003-004

HOW IT WORKS


Communication + Installation

The Remote Access is simply connected to the home network. It then connects to the portal server (www.securedeviceaccess.net) automatically through your existing Internet connection. Communication between the Remote Access and the portal server is encrypted and secured with digital certificates.

With a connection to the home network, you can now access almost all of your network devices using the Internet. Depending on the network protocols supported by the respective device, access occurs directly through the SDA portal server or through the "SDA client" software available for windows platforms.

If you have a KNX installation in your house, you can connect it to the ISE SMART CONNECT KNX REMOTE ACCESS using the KNX connection if desired. This enables you, or your electrical installer, to access your KNX devices from anywhere, e.g. with the ETS.

Don't worry, though. The portal server is located in Germany and is subject to the German Data Protection Law.

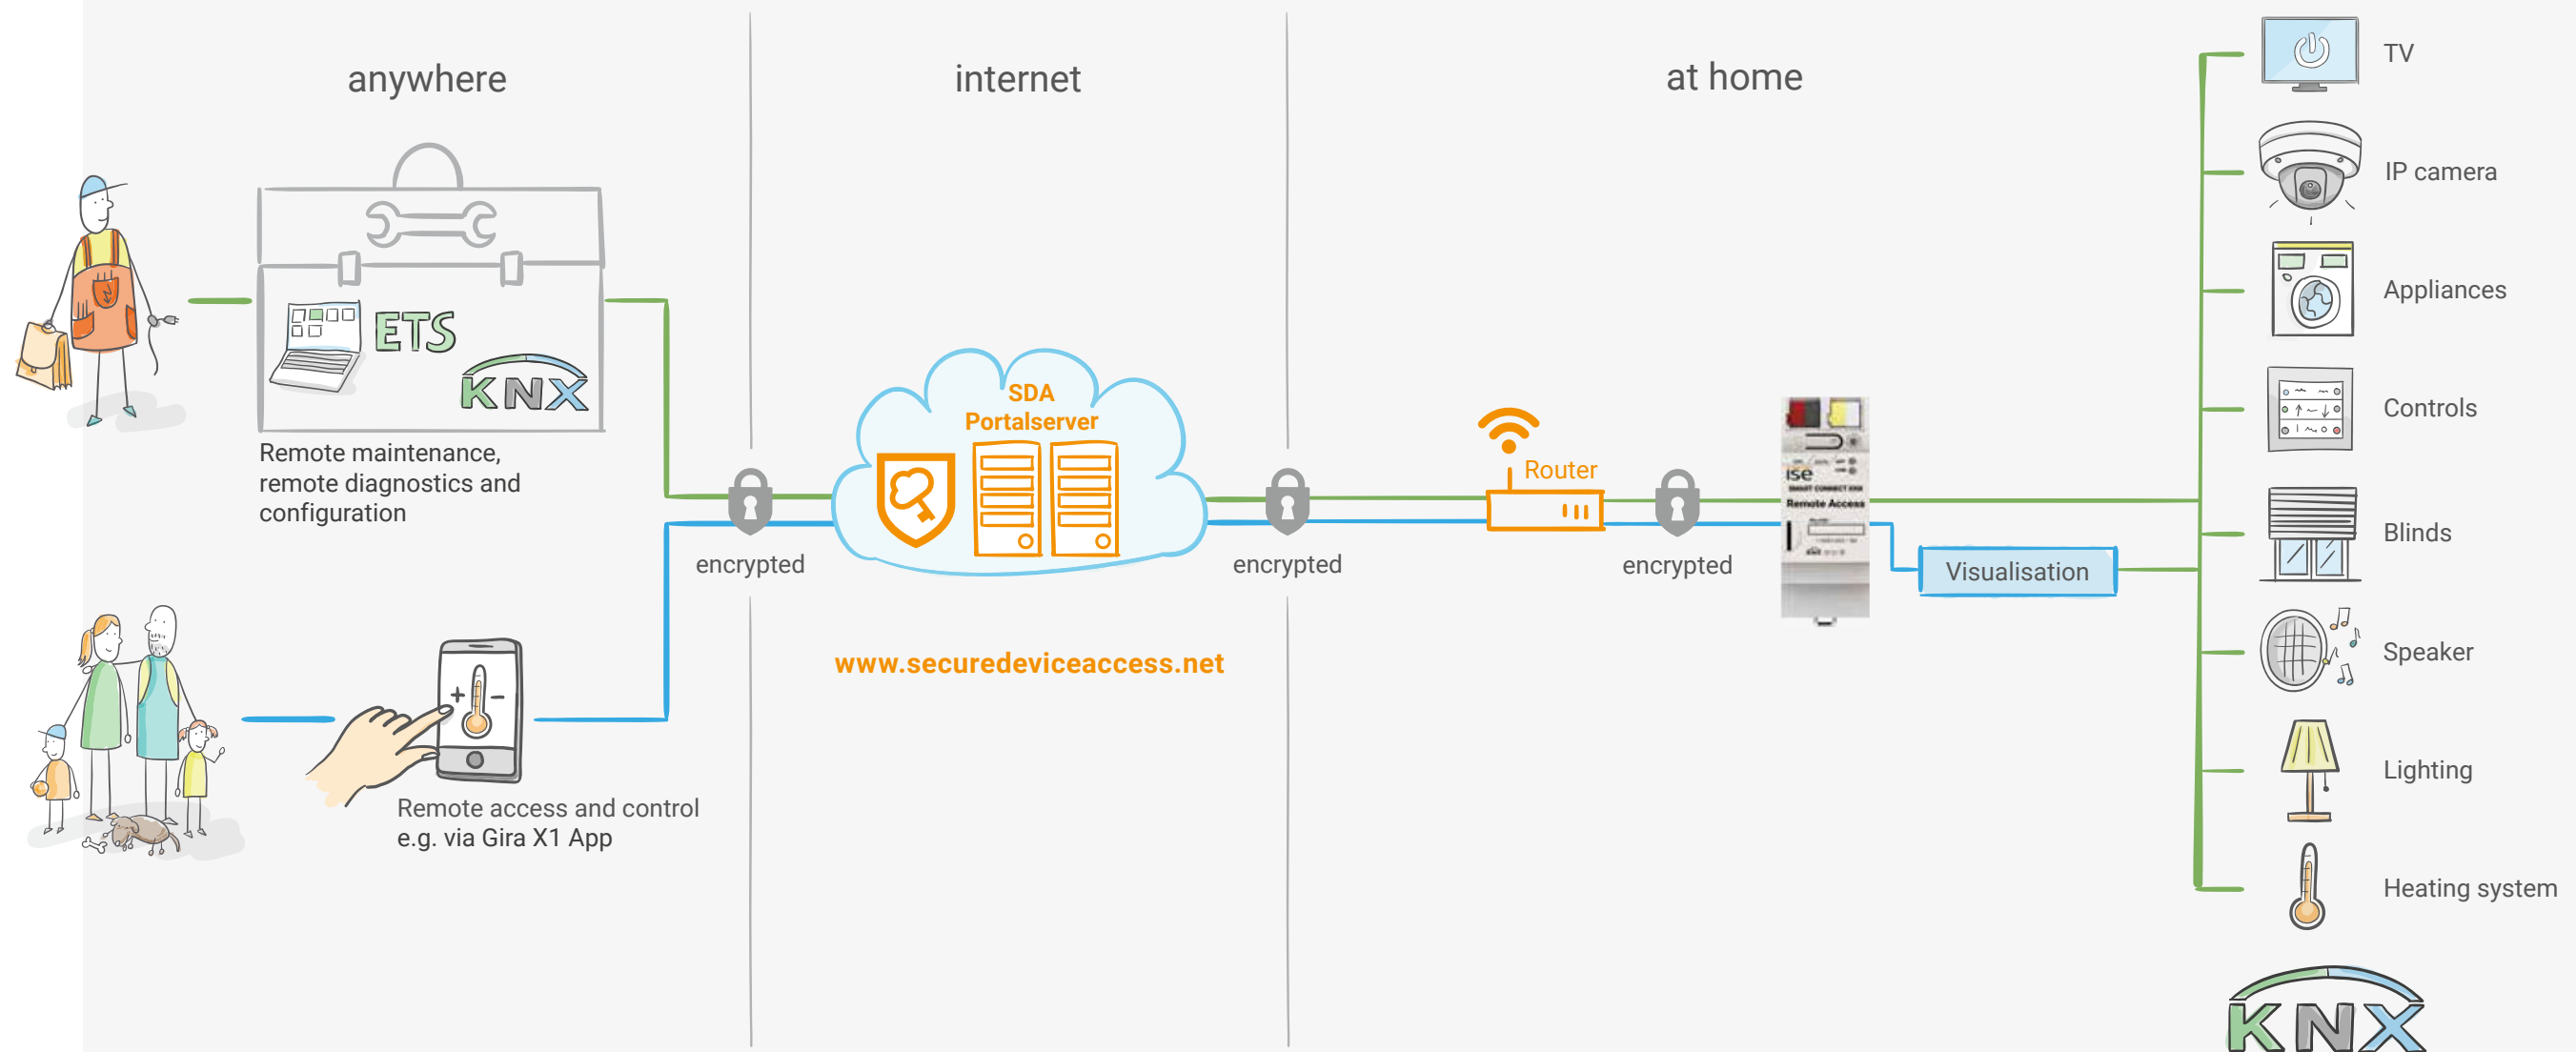

CAN YOU HEAR IT?

SONOS IS ROCKING OUT WITH KNX

ISE SMART CONNECT KNX SONOS

A smart start to your day

Is the light in your bathroom already switched on by a presence detector? Why not switch on your favourite radio station automatically at the same time? Perhaps you'd like to listen to the news in the morning, the latest charts during the day and then something calming in the evening.*



Are you still calling out, "Kids, lunch is ready"?


Save your vocal cords, and your nerves. Simply start the lunch call on your selected players with the push of a button, even if they're already playing something else or are muted. Your family will be conveniently notified, and nothing else will stand in the way of lunch together.



A doorbell over Sonos?

Why just use the standard door bell when you can have the doorbell played on all Sonos players while pausing music playback. Visitors will never go unheard again.

*Additional logic required.

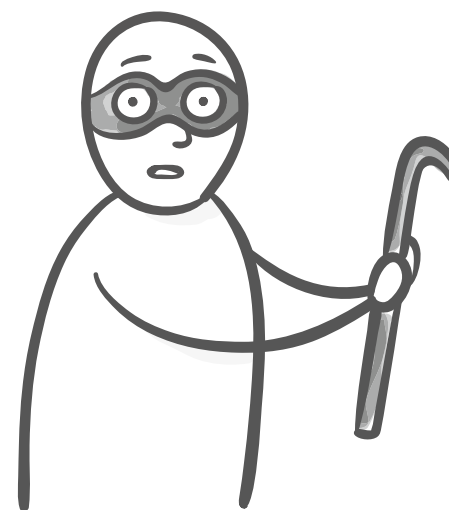

Deterring intruders

Use your Sonos system to simulate presence, e.g. using a KNX motion detector. What thief is going to break in if they hear voices or loud dog barking?

Get the party started

Up to ten Sonos master devices each with one master and up to five slaves can easily be controlled via KNX. Optionally, each room can be operated separately or, using party mode, the entire house simultaneously.



Sonos Play1 and Connect:Amp

Up to ten Sonos master devices and 50 slaves can easily be controlled via KNX

SONOS



Optionally, each room can be operated separately or, using party mode, the entire house simultaneously.

Crystal-clear hi-fi sound and virtually unlimited sound scenarios: The Sonos sound system gives digital music a diverse landscape made up of different wireless loudspeakers and audio systems. This acoustic marvel had just one catch up until now: It had to be operated using a special app, especially when used with zones. A chore for every KNX user.

Now, the ISE SMART CONNECT KNX SONOS is opening up the world of KNX to this popular family of sound and making it even easier to use. Up to ten Sonos master devices can be connected via IP with dynamic zone creation. Each of these master devices, in turn, can be networked with up to five slave devices. Here, either a separate music program is assigned to each master device or a master device operates the entire device landscape.

+ POINTS

- + Separately control music playback in up to 10 rooms
- + Trigger dynamic grouping of loudspeakers via KNX
- + Interrupt playback or unmute for announcements like bell, lunch call or wake-up alarm
- + Simple integration into the KNX with ETS
- + Announcements and playlists directly from the device (microSD card)



Sonos Play1

SONOS


FEATURES

- Dynamic group creation for up to 10 groups, each with one master and up to five slave devices
- Control of playlist start, pause, mute and stop for each group
- Playlist (forward/back)
- Title (forward/back)
- Random playback of titles
- Complete volume control of masters, slaves and the entire group
- Title, artist and album in scrolling text on KNX text objects
- Direct selection of the starting title of playlists
- Volume pre-selection and unmuting during source selection
- Patching in of announcements (temporary interruption of the current playback)
- Play music from the microSD card
- Support for analogue and optical inputs of the Sonos Playbar and Sonos Connect/Connect:Amp
- Simple integration in KNX (can be completely configured via ETS)
- Random playback of titles in playlists
- Random starting point in playlists
- Repeat of playlists
- Extensions via firmware updates

HOW IT WORKS

Communication + Installation

The ISE SMART CONNECT KNX SONOS is simply connected to your KNX installation and the home network on which your Sonos system is also located. Use the ETS to make configurations, create and set up playlists and Bob's your uncle. You're ready to go.

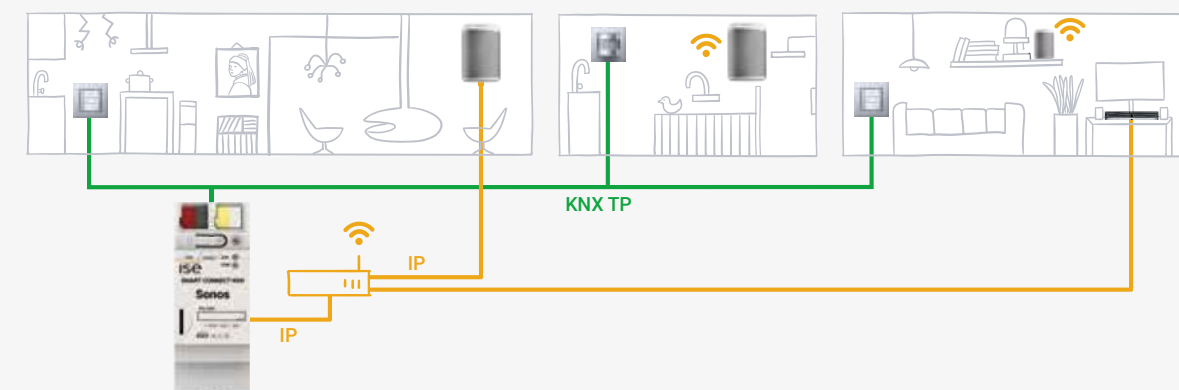

TECHNICAL DATA

Rated voltage:	DC 24 V to 30 V
Power consumption	2 W
IP communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
microSD card:	up to 32 GB
Connections:	2x RJ45 (integrated switch) Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

Note: Supply via external DC 24 V. For ETS5 or higher.
MicroSD card not included.

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE



Ordering info:
Item number: 1-0001-002


LIGHT ON, DIMMED OR BRIGHT – NO APP REQUIRED

ISE SMART CONNECT KNX HUE

hue


Using and dimming portable lights

Take advantage of the opportunity to integrate portable lights into your KNX system straight away – even dimming them (unlike with other lighting controls). You can wake up to a simulated sunrise in the morning, for example.

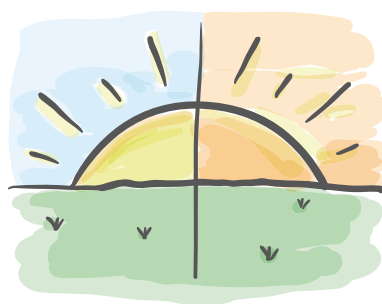

Bedtime and wakeup scenarios

To help children fall asleep more easily, for example, brightness can be reduced in intervals. In the morning, a simulated sunrise ensures natural awakening.



Signalling events

Someone is pressing the doorbell button, the washing machine is finished or a call signal is being initiated. Use Philips Hue lights together with KNX to signal events. You can make the lights flash green when someone presses the doorbell button, for example, so that sleeping children are not awoken by a ringing doorbell.




Philips Hue Iris

Philips Hue White and Color Ambiance Starter set (E27)




Ambilight TV, Philips Hue and KNX

If you have a Philips television with the Ambilight function, Philips Hue makes your viewing experience even more intense, colourful and captivating. The same lights can also be operated via KNX on an as-needed basis.

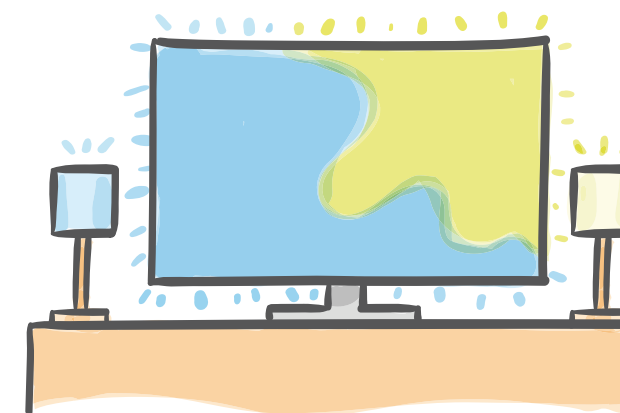

Use light against intruders

The Philips Hue system can be easily integrated into the occupied-home simulation via KNX. This "puts a spotlight" on uninvited guests, too.

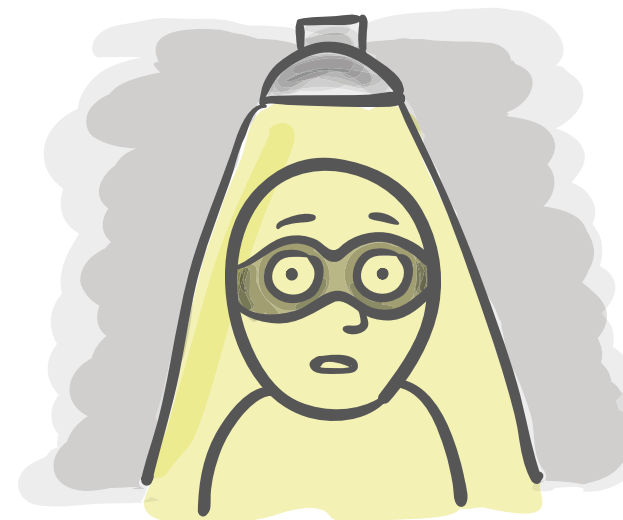

The Philips Hue lighting system can now also be operated via KNX

Colour value, temperature and brightness can be defined for every light, making each completely customisable.

hue

Recreate the summer mood captured with your smartphone at the seaside at home. Program your own sunrise. Set the right scene at your house party. Using the Hue wireless illumination system from Philips, you can customise lighting and thereby increase the quality of your life. It used to be an impediment for all KNX users – a lack of perfect integration into the KNX system.

Now, the ISE SMART CONNECT KNX HUE provides a solution for this. Thanks to the innovative KNX adapter, up to 25 Hue lights can be controlled by each dimmer or switch via KNX. The LED technology in the light sources opens up a broad spectrum of light tones, from warm to vibrant. Individualized RGB values can be specified for each individual light. You can conveniently choose between entire light scenarios or separate operation using the KNX operating element.

+ POINTS

- + Control portable lighting like bedside lamps and floor lamps
- + Execute scenes from the Philips Hue System via KNX
- + Trigger visual notifications through signal flashing from Philips Hue scenes via KNX
- + Control up to 5 Philips Hue Bridges with one single device
- + Compatibility with common Color Pickers (Gira, Elsner, Jung)



Philips Hue Bridge

FEATURES


- Separate control of up to 25 Philips Hue lights
- Support of up to five Philips Hue Bridges per device
- Switching and dimming
- Individual control of RGB colour values
- Individual control of the colour temperature
- Configuration of switch-on brightness per lamp via ETS or device website
- Configuration of dimming behaviour per lamp via ETS or device website
- Colour conversion for compatibility with common Color Pickers (Gira, Elsner, Jung)
- Calling up Philips Hue scenes
- Signal flashing of Philips Hue scenes (specific duration, return to original state)
- Alert flash per lamp
- Colour gradient function per lamp
- Connection status of Bridge or lamps on KNX
- ETS product database entry with channel structure
- Simple integration into KNX (can be completely configured via ETS)
- Extensions via firmware updates

hue

HOW IT WORKS

Communication + Installation

The ISE SMART CONNECT KNX HUE is simply connected to your KNX installation and the home network on which your Philips Hue bridge is also located. Use the ETS to make configurations and set up lights and Bob's your uncle. You're ready to go.

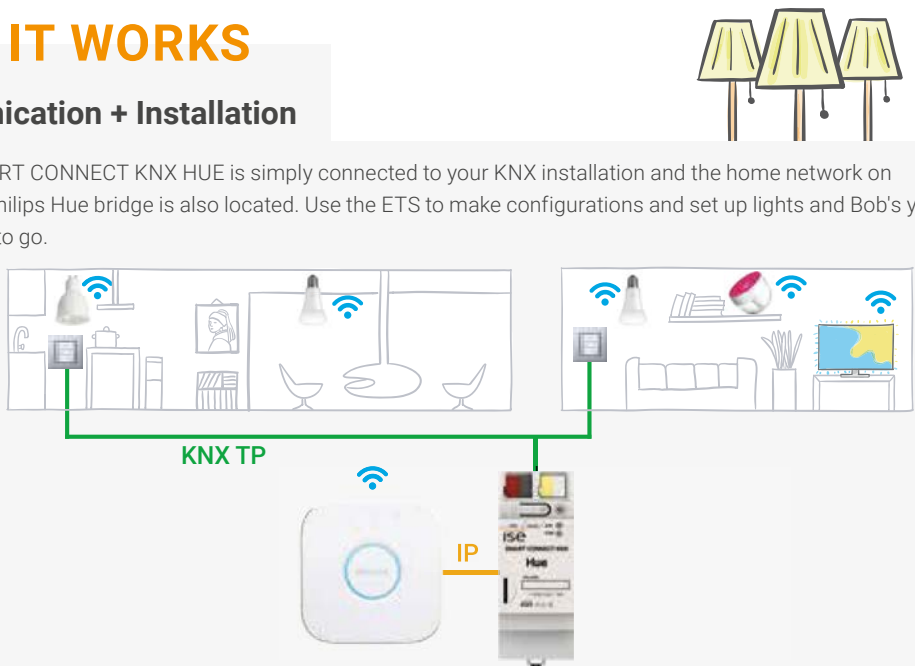

TECHNICAL DATA

Rated voltage:	DC 24 V to 30 V
Power consumption:	2 W
IP communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
Connections:	2x RJ45 (integrated switch) Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

Note: Supply via external DC 24 V. For ETS5 or higher.

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE



Ordering info:
Item number: 1-0002-003


COSY WARM AND EFFICIENT – VAILLANT SNUGGLES UP WITH KNX

ISE SMART CONNECT KNX VAILLANT





Controlling heat as needed

Effective immediately, times and setpoint values for heating and hot water can be easily and quickly entered into the visualisation or any other operating device. This saves energy, as the system only works when it's needed.

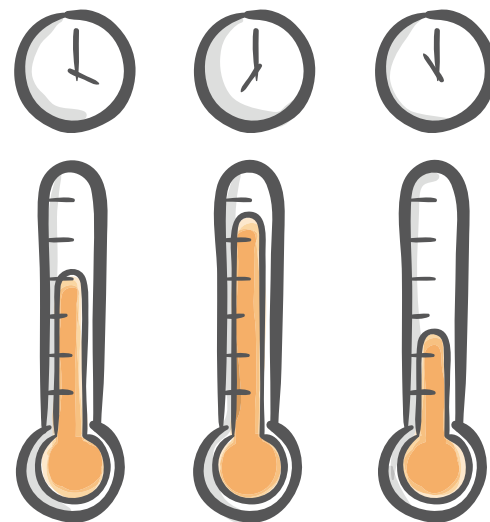

Automatic ventilation

The ventilation system is started automatically after a meeting, e.g. after the last person has left the room. In this way, the following meeting can begin in a pleasant climate.

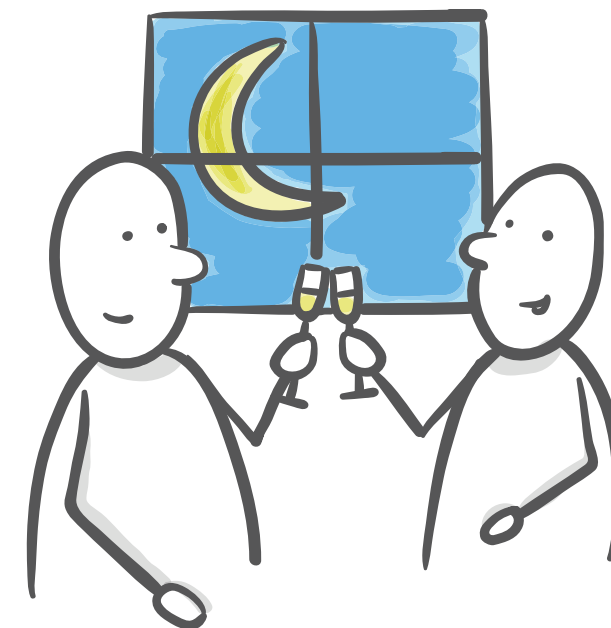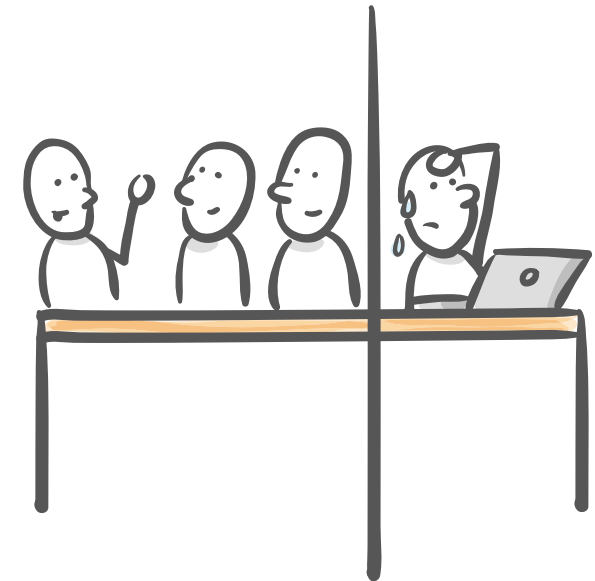

A mode for long evenings

The night mode of the heating system can, for example, easily be set to a later point in time with the push of a button for the well being of guests at a later hour as well.



Vaillant MultiMatic700 and Vaillant Condensing boiler

Convenient integration of Vaillant heating systems into the KNX system

Together with the multiMATIC controller, the ISE SMART CONNECT KNX Vaillant offers integration between eBUS and KNX.

With the ISE SMART CONNECT KNX VAILLANT, you can now also switch your heating system to "standby mode." This allows you to reduce the room temperature setpoint values in all rooms (if desired) and minimise heating.

Do you wish to be able to react to short-term changes in use quickly and easily (longer than usual periods of absence, visits by friends, parties etc.)?

With the ISE SMART CONNECT KNX VAILLANT, the times and setpoint values for heating and hot water can be changed temporarily or you can adjust ventilation control (especially through ventilation boosting) to your current requirements.

+ POINTS


- + Save energy during longer absences
- + Integration of heating and ventilation in usage scenarios
- + An overview of consumption and yield values
- + Integration into visualisations, e.g. Gira HomeServer
- + Recommended by Vaillant



HOW IT WORKS

Communication + Installation

The ISE SMART CONNECT KNX VAILLANT is simply connected to the eBUS of your KNX installation. Use the ETS to make configurations, carry out set up and Bob's your uncle.

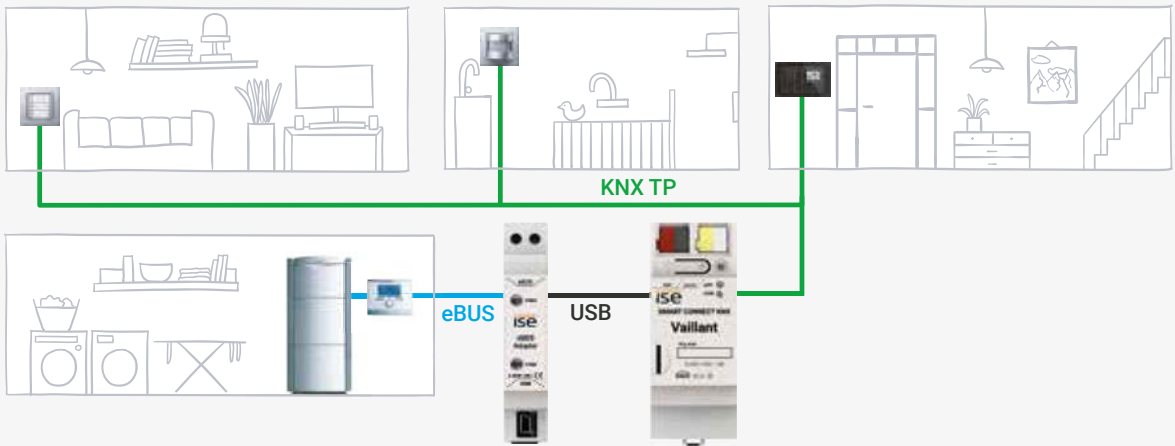

Vaillant MultiMATIC700

FEATURES

- Control of operation mode and temperature setpoint values for up to three heating zones
- Control of operation mode and temperature setpoint value for hot water supply
- Control of ventilation system operation mode
- System information like service mode, error messages, date and time, outside temperature and system status
- Yield values of solar systems and heatpumps
- Consumption values for hot water supply and heating (electricity and gas)
- Handover protocol from installer to system integrator
- Simple integration into KNX (can be completely configured via ETS)
- Extensions via firmware updates

TECHNICAL DATA

Gateway

Rated voltage:	DC 24 V to 30 V
Power consumption:	1,2 W
IP communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
Connections:	1x RJ45 1x USB Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

eBUS Adapter

Rated voltage:	Supply via eBUS and USB Power
Power consumption:	0,1 W
Connections:	Mini USB B eBUS via 2-pole screw terminal
Ambient temperature:	0 °C to +45 °C
Dimensions:	1 TE (REG)

Note: Supply via external DC 24 V. Set consists of eBUS adapter and gateway. Only for systems with the heating controller multiMATIC. For ETS5 or higher.

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS:
PLEASE CHECK:
WWW.ISE.DE



Ordering info:
Item number: S-0001-006

INNOVATIVE SINGLE-ROOM CONTROL – NOW, VIEGA AND KNX TAKE CARE OF THINGS TOGETHER

ISE SMART CONNECT KNX VIEGA

The ISE SMART CONNECT KNX VIEGA integrates the innovative Fonterra Smart Control single-room control by viega into the KNX system. Up to five base stations can be controlled with the ISE SMART CONNECT KNX VIEGA. Up to 8 room temperature controllers and 12 outlets can be connected to each of these base stations.

For more information on the Fonterra Smart Control, please see www.viega.de.

Intelligent energy saving

During longer periods of absence, such as holidays or business trips, you can simply set the system into absence mode. You can also define your scheduled return time. The system will make sure that the heating is on at the right time, whilst saving considerable energy during the remaining period.

A comfortable temperature at just the right time

Cosy warmth in the bathroom in the morning, soothing coolness in the bedroom at night. The Fonterra Smart Control will take care of the rest.


While you're away

With remote access, such as the ISE SMART CONNECT KNX REMOTE ACCESS and a KNX visualisation, you can easily adjust the temperature to suit your individual requirements even when you're not at home.

HOW IT WORKS

Communication + Installation

The ISE SMART CONNECT KNX VIEGA is simply connected to your KNX installation and the home network on which your Fonterra Smart Control base station with WLAN module is also located.

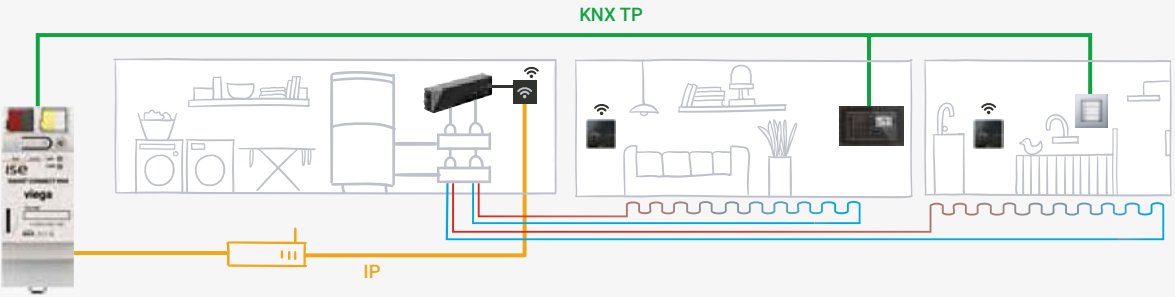

Fonterra Smart Control Base Unit

+ POINTS

- + Saving energy during longer absences
- + Integration of panel heating into usage scenarios
- + Integration into visualisations, e.g. Gira HomeServer, Gira X1
- + Absence mode and scheduled return can be configured
- + Hydraulic balancing takes place automatically and permanently



Fonterra Smart Control Room Thermostat



FEATURES

- Support of 5 base stations each with up to 8 room temperature controllers and 12 outlets
- Room temperature control
- Switching between heating and cooling mode
- Power level control
- Absence control
- System information such as error messages or updates from viega
- Simple integration in KNX (can be completely configured via ETS)
- Extensions via firmware updates

TECHNICAL DATA

Rated voltage:	DC 24 V to 30 V
Power consumption:	2 W
IP communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
Connections:	2x RJ45 (integrated switch) Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)
Note: Supply via external DC 24 V. For ETS5 or higher.	

UPDATES ENSURE THE CONTINUOUS IMPROVEMENT OF OUR PRODUCTS. PLEASE CHECK: WWW.ISE.DE



Ordering info:
Item number: 1-000A-008

SMART HOME ENTERTAINMENT WITH PANASONIC AND KNX

ISE SMART CONNECT KNX PANASONIC

With the ISE SMART CONNECT KNX PANASONIC gateway, up to four televisions can be integrated into KNX and used as an important element of your Smart Home. Be inspired by new and versatile possibilities!



Comfortable awakening

A smart day begins. Raising blinds slowly let in daylight. Your Panasonic TV device welcomes you with your favorite news channel.




The doorbell rings

Looking at your TV and find out whether guests are already at the door. Sitting on the couch you can comfortable see the image of the outdoor camera on TV screen.



Leaving the house

You leave your house well informed. Not only your lights are switched off - your Panasonic TV devices goes to standby or it becomes part of an occupied-home simulation.



Save standby costs

How to save energy? After a defined time in standby, the power outlet of your Panasonic TV device is turned off. It is turned on again by a TV scene or a motion detector.



Your notifications on the TV

Your smart washer has finished? Movement in the garden? Display self-defined message texts on your TV. Comfortable and individual.



A cinematic experience after work

Your day was busy – it's time to enjoy your evening! Your individual cinematic experience starts turning on your Panasonic TV. Blinds darken the room, light and sound creates the fitting mood. Only popcorn and friends give you a greater cinematic experience.


+ POINTS

- + Display IP camera pictures on screen
- + Display self-defined message texts
- + KNX certified
- + Complete configuration via ETS

HOW IT WORKS

Communication + Installation

The ISE SMART CONNECT KNX PANASONIC is simply connected to your KNX installation and the home network on which your Panasonic TV device is also located. Simply configure the gateway via the ETS and you're good to go.

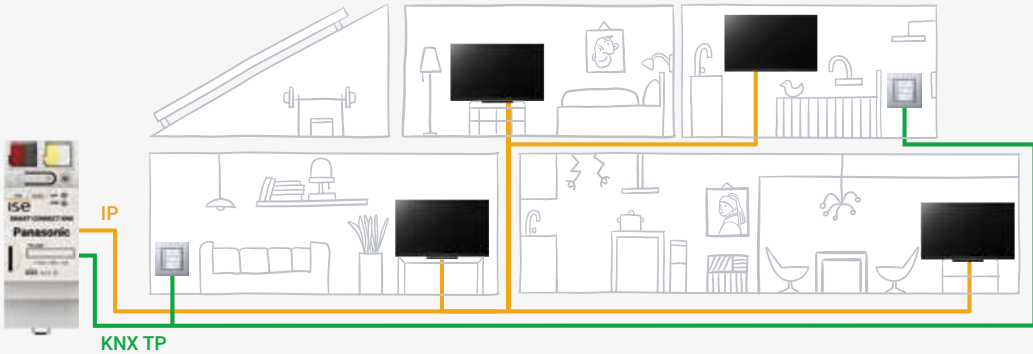

Panasonic-TV

FEATURES

- Separate control of up to four televisions
- Television on/off
- Wake on LAN power on support
- Volume control (switch the sound on and off, mute the TV device, increase/lower the volume, in stages or directly, to absolute or relative value)
- Program control (change to the next or the previous program channel, change to a particular program channel)
- Transfer camera images, e.g. from an external camera
- Bookmark up to ten links
- Display predefined text (use up to ten self-defined texts or dynamically display texts from other devices on the TV device, e.g. "Movement detected in garden" from an outside camera), display message as text
- Source selection (flexibility of choice between the sources of the TV device, e.g. switch conveniently between HDMI input and receivers)
- Statusreport via KNX (current channel, current source, current volume, mute status, operating status, current errors)
- Simple integration in KNX (can be completely configured via ETS)
- Extensions via firmware updates

TECHNICAL DATA

Rated voltage:	DC 24 V to 30 V
Power consumption:	2 W
IP Communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
Connections:	2x RJ45 (integrated switch) Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

Note: Supply via external DC 24 V. Supports 2019 Panasonic 4K HDR TVs from GXW804-series onward. For ETS5 or higher.

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE




Ordering info:
Item number: 1-000C-000

KNX NOW HAS EYES

ISE SMART APP KNX AXIS

Reliable motion detection via KNX

Who needs umpteen camera recordings of trees moving in the wind or moths flitting around the light? In future, use your KNX motion detector to start recordings and record only those things which are important.

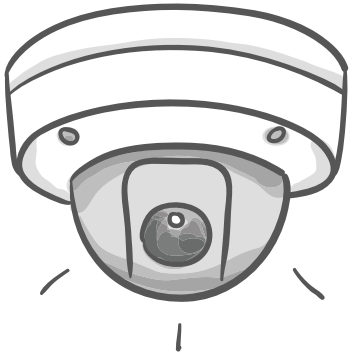

Enjoy your privacy

If you'd like to enjoy the garden, deactivate motion detection and/or activate the private zone masks of your surveillance camera, e.g. with a KNX door contact on your terrace door. Bothersome switching off of the PoE power supply is no longer necessary.




The camera produces the deterrent

If unauthorised persons tamper with your house, the camera registers this movement and not only starts recording, but also switches on the lighting and television via KNX and begins playing announcements (dog barking, voices etc.), e.g. using the Sonos sound system. There are no limits to your imagination. Discover deterrents on a whole new level.




Outwitting made difficult

Someone sabotages your camera by covering it or spraying it with paint. As soon as this happens, an alarm is triggered and you are notified. This enables you to actively intervene in the event as it unfolds, not after the saboteur has finished the job.

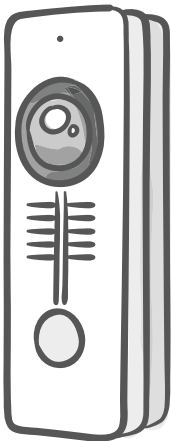


Door station with KNX

Don't just integrate network-only cameras into the KNX – include your door stations from Axis Communications as well. Use the call button to play a ring tone using the KNX and Sonos sound system, for example.

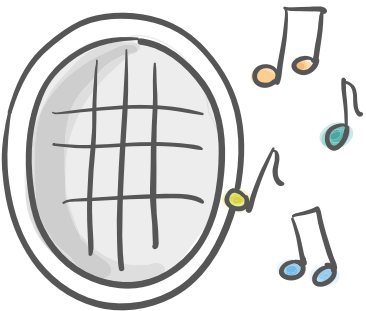

Loudspeaker with KNX

Your loudspeakers from Axis Communications can be integrated into your KNX system as well, thus enabling the control of loudspeaker playback in your shop over KNX, for example.

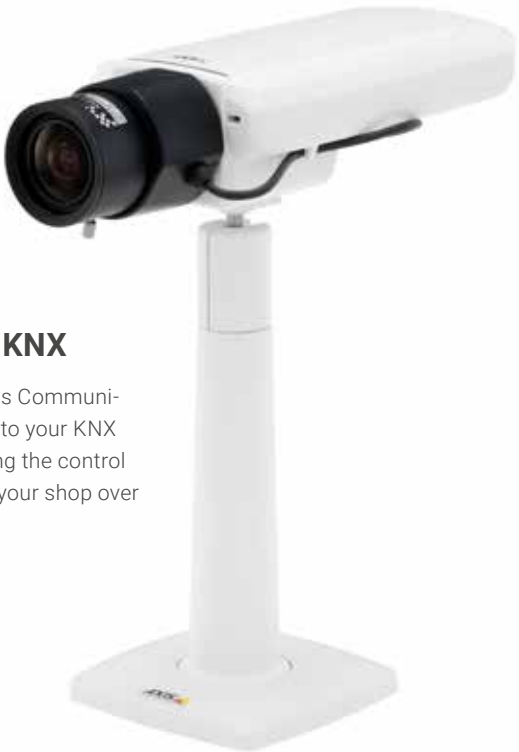

Building automation and security technology combined

The world's first KNX connection (plug-in) for networking products from the Axis Communications company.

Combine the world of building automation (KNX) with the security technology of the Axis Communications company. Utilise the strengths of both worlds and integrate network cameras, door stations and network loudspeakers into the KNX – with no additional hardware. Simply install our plug-in onto the Axis IP product, configure it and Bob's your uncle.


+ POINTS

- + Perfect integration of Axis network devices into application scenarios
- + Stronger combination of both systems. Motion detector (KNX) starts the action or Cross Line Detection (camera) switches on the light
- + Private sphere (masking) can be controlled via KNX, for instance, through presence and absence
- + Camera responds directly to KNX/IP after successful installation
- + Third-party applications on the camera can also communicate with KNX
- + In addition to network cameras, all Axis network devices with ACAP are also supported

HOW IT WORKS

Communication + Installation

The ISE SMART APP KNX AXIS plug-in is installed directly on a network device (e.g. network camera) based on an Axis ACAP (AXIS Camera Application Platform). After successful installation, the Axis network device is a KNX/IP device and communicates with the world of KNX via KNX/IP routing. The plug-in is configured on the network device (event system) and in the ETS. KNX installations are usually implemented with two wires (TP), meaning that a KNX/IP router has to be present in this installation (often already present in KNX visualisation systems) to enable communication between KNX/IP and KNX/TP.

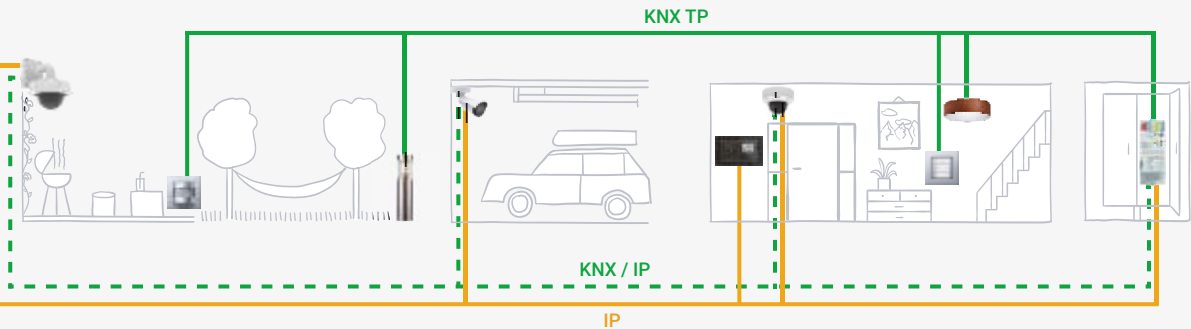

AXIS Dome Q37



FEATURES

- Support of Axis network cameras
- Support of Axis WLAN cameras*
- Support of Axis D2050 -VE Network Radar Detector
- Support of Axis door stations
- Support of Axis network loudspeakers
- 30 communication objects for sending from KNX to the Axis camera (1 bit)
- 30 communication objects for sending from the Axis camera to KNX (variable bit length)
- Control of actions on the camera
- Triggering of image, video and/or camera message sending
- With PTZ cameras, predefined positions can be focused on
- Camera settings (properties) can be read out and sent to the KNX
- Sending of a message to the KNX with access to the camera's live stream
- Monitoring of the camera itself, e.g. for overheating or breaking of the connection to the saving location for videos
- Third-party applications can send values to the KNX
- Simple integration into KNX (can be completely configured via ETS and the camera's event system)



AXIS D2050-VE Network Radar Detector

TECHNICAL DATA

KNX communication: KNX/IP (Routing), S-Mode

Note: The plug-in can only be used on network devices from Axis Communications with ACAP support. For ETS5 or higher.



UPDATES ENSURE THE CONTINUOUS IMPROVEMENT OF OUR PRODUCTS PLEASE CHECK: WWW.ISE.DE

Ordering info:

Item number single license: A-0001-008
Item number 5 volume license: A-0001-019
Item number 10 volume license: A-0001-020

*Only in combination with other system components that support reliable communication, e.g. Gira KNX/IP Router.

CHARGE CLEVER WITH E-CHARGE

ISE SMART CONNECT KNX E-CHARGE

Our ISE SMART CONNECT KNX E-CHARGE enables you to integrate up to five charging stations into your KNX. Connect your charge points for example with a "ready to charge/occupied" indicator or display in your building, if a vehicle is still charging. Set your starting current and maximum current in your central control.



Charging station DESIGN-TOWER

Ecological, economical or individual charging



Control charging via KNX! Use advantageous electricity pricing and electricity generated by your renewable energy source to charge your vehicle when it is convenient for you. Or individually by pressing a button.

Set the current



Your charging station can adapt to the needs of your electric grid. Now you can also operate and monitor it via KNX. For example: While your washing machine is washing, the current for your vehicle is being throttled – comfortably from within your house.

Informed charging



You want to know if and how many cars are connected or being charged at your charging station, but you don't want to go to your garage? Be informed comfortably via KNX – where you want to and the way you want to!

+ POINTS

- + Up to five charge points connected to KNX
- + Monitor and control the charging current via KNX
- + Enable or disable charge points via KNX
- + Connect via Modbus adapter

FEATURES

- Integrate up to 5 charge points into the KNX system
- Status request of the maximum permitted current and the starting current
- Setting the charge current between 6 and 32 Ampere
- Status request of the availability of the charging station (free, occupied/not charging, occupied/charging, occupied/charging/ventilation needed)
- Enable or disable charge points individually
- Show operation readiness of the charging stations
- Read out error messages via error code display
- Extensions via firmware updates

TECHNICAL DATA

Rated voltage:	DC 24 V to 30 V
Power consumption:	3 W
IP communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
Connections:	1x RJ45 1x USB Type A Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

Note: Supply via external DC 24 V. For ETS5 or higher. The connection to the charging stations is made via a Modbus adapter (not included in the scope of delivery). You can find compatible charge points on our website.

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE




Ordering info:
Item number: 1-0004-016

HOW IT WORKS

Communication + Installation

The ISE SMART CONNECT KNX E-CHARGE is simply connected to your KNX installation and via USB to the Modbus adapter of your charging station. Use the ETS to make configurations and you have full control over your charging station.

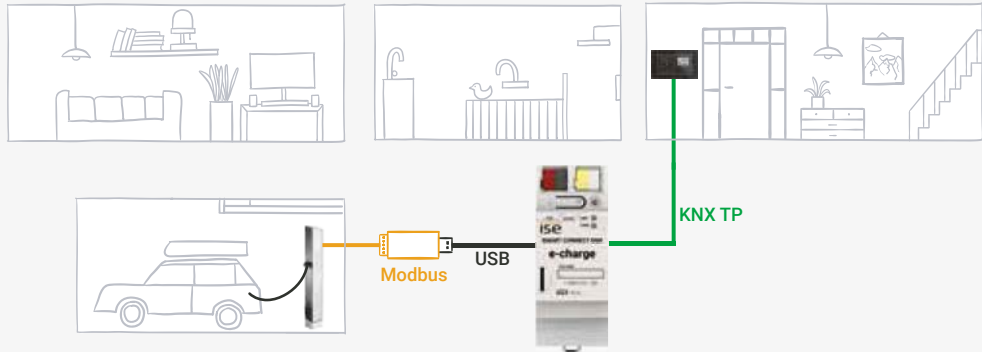

LET THE COOKING SHOW BEGIN

ISE KNX SIB MODUL RF/TP



Make a scene

Make a scene in the kitchen. The ceiling extractor hood slides out of the ceiling, the hob lighting immerses the cooking zone in a pleasant working light and the fan starts.

The ISE KNX SIB MODUL TP or ISE KNX SIB MODUL RF connects the extractor hood ranges by berbel and WESCO with the KNX building automation system.

Are you dreaming of a new kitchen? Is your old extractor hood too noisy or weak? Would you like to include a new extractor hood in your integrated kitchen? Are you building your dream home with an open-plan kitchen? Whatever your ideal kitchen looks like,

Let there be light

When you switch the light on, the extractor hood no longer stays in the dark. Integrate the hob lighting conveniently into the kitchen lighting concept.



with an extractor hood by berbel or WESCO, perfection is guaranteed. The patented functional principle offers you the most effective air cleaning in the history of extractor hoods – complete with centrifugal force without performance-reducing grease filters. Best air quality is the best recipe for a first-class quality kitchen. But just cleaning the air is not enough. Modern ventilation technology needs to do more: it also has to be able to meet the ever-growing demands for efficiency.

FEATURES

	ISE KNX SIB MODUL TP	ISE KNX SIB MODUL RF
Communication	KNX/TP	KNX/RF
Ventilation level control	1 / 2 / 3 / P	
Effect lighting	on / off	
Hob lighting	on / off / dim	on / off
Hob lighting intensity	Warm white / Cool white	-
Drive	-	up / down
EcoSwitch	Ventilator / Extractor	
Integration KNX window contact	Yes	

Available for extractor hoods (manufacturer information)


berbel	<ul style="list-style-type: none">• Table lift hoods• Island hoods*• Headroom hoods• Wallmounted hoods*• Built-in hoods• Fan units	<ul style="list-style-type: none">• Skyline• Skyline Edge• Skyline Edge Sound• Skyline Edge Individual• Skyline Round• Skyline Edge Light
WESCO	<ul style="list-style-type: none">• COMFORT• ECO• berbel	<ul style="list-style-type: none">• Skyline• Skyline Edge

TECHNICAL DATA

	ISE KNX SIB MODUL TP	ISE KNX SIB MODUL RF
Communication (KNX)	KNX/TP, S-Mode	KNX/TP, S mode Transmission power: 14 dBm Sensitivity: -105 dBm
KNX power consumption	0,06 W	-
Rated voltage (SIB)	DC 5 V	
Power consumption (SIB)	0,08 W	0,12 W
Connections	<ul style="list-style-type: none">• SIB connector• Connection and branch terminals for KNX	<ul style="list-style-type: none">• SIB connector
Ambient temperature	-5 °C to +45 °C	
Dimensions	71 mm x 42 mm x 12 mm	

Note: For ETS5 or higher.

**Except the model series Smartline.*

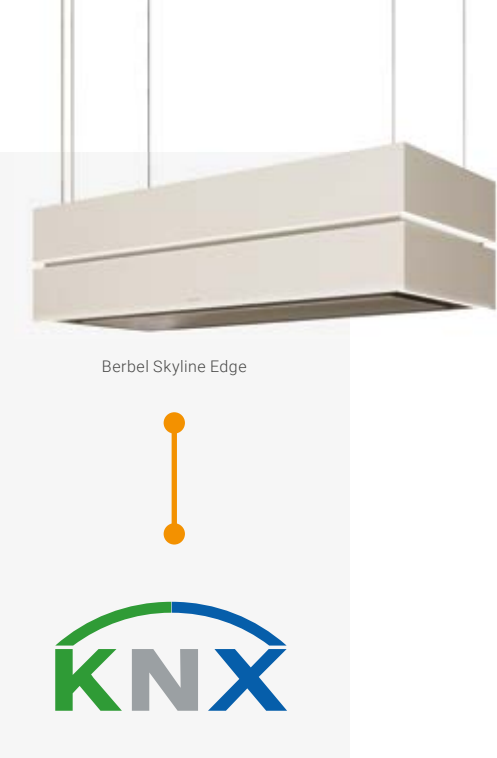

**UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE**

Ordering info:

The modules cannot be ordered separately, since they are already pre-assembled in the extractor hoods in the factory. For more information on the extractor hoods and how to order them, please contact the corresponding manufacturer:

berbel Ablufttechnik GmbH
Sandkampstraße 100
D-48432 Rheine
Phone: +49 (0)5971 80809-0

www.berbel.de
info@berbel.de

WESCO AG
Tägerhardstrasse 110
CH-5430 Wettingen
Phone: +41 (0)56 438 11 11

www.wesco.ch
info@wesco.ch



EVERYTHING'S POSSIBLE WITH THE PROGRAMMABLE



ISE SMART CONNECT KNX PROGRAMMABLE



From electricity meter to heating: With the ISE SMART CONNECT KNX PROGRAMMABLE, third-party devices can be connected to the KNX bus in a simple and reliable way. This enables individualised connection logic to be developed in just a few days. The barrier to the world of building automation has never been this low.

For communication with the third-party system, the IP and USB interfaces can be used. The Programmable is the first successful

affordable alternative to costly device development. Not only is the low price of the device itself impressive, but its further development is affordable as well. Either C# or VB.Net can be used to implement the application. This means that widely used and free programming tools can readily be used.

+ POINTS

- + Simple integration of third-party systems into KNX
- + Ready-certified KNX device
- + Connect third-party systems via IP or USB
- + Execution of .NET application (C# or VB.Net)
- + Comprehensive SDK
- + Protection of own application against unintentional duplication

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE

FEATURES

- Programming of the application in C# or VB.Net
- Up to 64 KNX communication objects (variable bit length)
- Version 1-0004-005: 1x IP and 1x USB connection
- Version 1-0005-006: 2x IP connection
- Ready-certified KNX device (can be completely configured via ETS)*
- Extensions via firmware updates

TECHNICAL DATA

Rated voltage:	DC 24 V to 30 V
Power consumption:	2 W (Ethernet Version: 2x RJ45) 3 W (USB Version: RJ45 + USB with 300 mA)
IP communication:	Ethernet 10/100 BaseT
KNX communication:	KNX/TP, S-Mode
KNX medium:	TP1-256
Connections:	2x RJ45 with integrated switch (Ethernet version) RJ45 + USB (USB version) Connection and branching terminals for KNX and 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

Note: Power supply via external DC 24 V. For ETS5 or higher.

Ordering info:



Item number:
2x RJ45
1-0005-006

Item number:
1x USB, 1x RJ45
1-0004-005

*The KNX certification for the ISE SMART CONNECT KNX PROGRAMMABLE is limited to the interworking ability with KNX products from other manufacturers.

POWERED BY

PROGRAMMABLE

OUR CATEGORY FOR PRODUCTS

BASED ON THE ISE SMART CONNECT KNX PROGRAMMABLE.



THE SAFEST, MOST CONVENIENT WAY OF OPENING A DOOR. EKEY KNX CONNECT.

EKEY KNX CONNECT. WE CONNECT EKEY WITH YOUR SMART HOME.

Fingerprints have not only been a resounding success on smartphones and tablets, but also in access control for companies or private residential buildings.

Blocking and lost or stolen keys will become a thing of the past with an ekey fingerprint access solution – you always have your finger with you.

Technical data and retailer info:

NOT AVAILABLE FROM ISE.
GET IT HERE:




NETYARD AG
Schanzenstr. 40
40549 Düsseldorf
Germany
igt@netyard.de
www.netyard.de/ekey

WOULD YOU LIKE TO JOIN US?

Would you too like to integrate your products and services into KNX? Let us know:

Phone: +49 441 680 06 11
E-mail: sales@ise.de



E3/DC STORES YOUR ELECTRICITY AND IS DESIGNED TO INCORPORATE KNX.

The S10 Hauskraftwerk home power station is a classic in the E3/DC range. Featuring a solar power inverter, energy management and online portal, this all-in-one system stores solar electricity efficiently and provides power to devices right when they need it.

This means the Hauskraftwerk electricity storage system and the central power switching unit are rolled into one, allowing E3/DC customers to achieve a very high level of self-sufficiency.

E3/DC has also developed the unique TriLINK® technology for this home power station. It provides backup power supply with solar re-charging in the event of a power failure. E3/DC's KNX CONNECT module is based on the PROGRAMMABLE and integrates the S10 series home power station into KNX.

Technical data and retailer info:

E3/DC GmbH
Karlstraße 5
49074 Osnabrück
Germany
Phone: +49 (0) 541 760 268 0
Fax: +49 (0) 541 760 268 199
info@e3dc.com
www.e3dc.com

NOT AVAILABLE FROM ISE.
GET IT HERE:
WWW.E3DC.COM



ACCESS TO YOUR KNX INSTALLATION SIMPLY VIA RADIO

KNX RF USB-STICK



Convenient and wireless access to a KNX installation from a PC or laptop.

The device serves as an interface to KNX installations via radio, using the KNX RF standard. This enables the communication of KNX devices with PC tools.

The interface structure corresponds to a common USB stick (USB 2.0 type A). The device does not feature any operating or display elements.

A KNX RF/TP media coupler is required in the KNX system for communication with fixed-wired KNX TP components.

+ POINTS

- + Wireless communication between PC and KNX/RF (radio)
- + Start-up and troubleshooting via ETS5 or higher
- + Supports longer telegrams (extended frames)
- + Supports the start-up of KNX/RF Secure devices
- + No additional USB driver required

FEATURES

- Supports the common EMI protocol (cEMI)
- Supply of device via the PC's USB interface
- Connection of PC and KNX via KNX RF radio
- Extensions via firmware updates
- Address assignment, programming and trouble-shooting of KNX devices via ETS from version 5
- Required standard Windows drivers are installed or activated automatically when device is inserted

TECHNICAL DATA

Rated voltage:	DC 5 V
Frequency:	868,3 MHz
Transmission power:	max. 25 mW
Transmission range in free field:	100 m (typical)
USB connection:	2.0 Typ A
KNX communication:	RF1.R, S-Mode
Ambient temperature:	-10 °C to +55 °C
Dimensions:	approx. 21 mm x 59 mm x 7,5 mm

Note: For ETS5 or higher.



Ordering info:
Item number: 3-0001-004



EXPERIENCE ISE PRODUCTS LIVE TEST LIVING IN A KNX HOME

Experience exclusive ease of living. Visitors can experience intelligently networked solutions with all their senses in the smart house in Rhaderfehn or a luxury private loft in Alling. You can even combine your visit with an overnight stay if you wish.

ise is a technology partner in the Connected Comfort brand alliance. Our products are integrated into viega and Vaillant systems and via our Remote Access. We provide the technological backbone to make your home smarter.

Connected Comfort is an alliance between the Gira, Jung, Brumberg, Dornbracht, Revox, Schüco, Vaillant and Warema brands. The common goal is to make buildings more intelligent across all trades and create completely new living experiences to a premium level.



Connected Comfort Zentrale
Hohenzollernstraße 5, 30161 Hannover, Germany
Phone: +49511 16767-120
E-mail: info@connected-comfort.de
Web: www.connected-comfort.de

powered by

GIRA

JUNG

BRUMBERG

**DORN
BRACHT**

REVOX

SCHÜCO

Vaillant

viega


warema

EASY ACCESS ON VAILLANTS GEOTHERM/3 HEAT PUMP

ISE SMART CONNECT MODBUS VAILLANT




As a Modbus TCP/IP gateway, the ISE SMART CONNECT MODBUS VAILLANT offers access to a Vaillant geoTHERM/3 heatpump, as well as to three Vaillant VR60 mixer modules and up to six Vaillant VR90 remote control devices. The established Modbus TCP/IP standard (e.g. Schneider SmartStruxure, Fidelix) enables the convenient integration of Vaillant heatpumps into the building technology.



Combination solar-power system and heatpump

Utilise the sun's energy efficiently and link your solar-power system to your heating system. The ISE SMART CONNECT MODBUS VAILLANT provides you with the required access to the heatpump.



Variable optimisation

Have your BMS record and visualise the system values of the heatpump. Using automatic recordings in the form of diagrams and tables, you can analyse and further refine the effectiveness of the optimisations of various different variables.



Monitoring

Create limit values using your BMS which, if overshoot or undershot, trigger the system to notify you automatically. This gives you the option of quickly responding to deviations. Remedy problems before convenience is impaired. Uncomfortably cold shower water is a thing of the past.


+ POINTS

- + Convenient integration of Vaillant heatpumps into the building technology
- + Control of a geoTHERM/3 heatpump via Modbus TCP/IP
- + Up to three VR60 mixer modules and up to six VR90 remote control devices can also be controlled
- + Recommended by Vaillant

HOW IT WORKS

Communication + Installation

The ISE SMART CONNECT MODBUS VAILLANT is easy to connect with the network and eBUS. Network settings for the configuration of the Vaillant system dimensioning are simply configured via the device website.

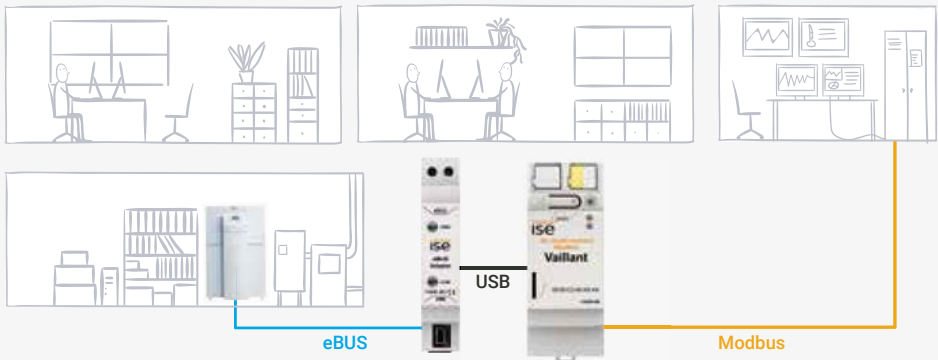

MODBUS



FEATURES

- Control of operating mode and temperature setpoint values for the heating circuits
- Control of operating mode for the heatpump
- Control of operation mode for up to three mixer modules
- Control of operation mode and temperature setpoint value for hot water supply
- Control of the operation mode of an auxiliary heater
- Access to status information such as temperature and pressure sensor values for integration into the building technology
- Easy configuration of system dimensioning using the device web page
- Extensions via firmware updates

TECHNICAL DATA

Gateway

Rated voltage:	DC 24 V to 30 V
Power consumption:	1,2 W
IP communication:	Ethernet 10/100 BaseT
Communication:	Modbus TCP/IP
Connections:	1x RJ45 1x USB Connection and branching terminals for 24 V
Ambient temperature:	0 °C to +45 °C
Dimensions:	2 TE (REG plus)

eBUS Adapter

Rated voltage:	Supply via eBUS and USB
Power consumption:	0,1 W
Connections:	Mini USB B eBUS via doubly terminal screw
Ambient temperature:	0 °C to +45 °C
Dimensions:	1 TE (REG)

Note: Supply via external DC 24 V. Set consisting of eBUS adapter and gateway. Compatible with Vaillant geoTHERM/3 V WS220/3 - 460/3 heatpumps.

UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS
PLEASE CHECK:
WWW.ISE.DE




Ordering info:
Item number: S-0002-007

SALES, SUPPORT & CONTACT

CONSULTATION AND SALES

Phone +49 441 680 06 11
Fax +49 441 680 06 15
E-mail sales@ise.de



Further national and international specialist electrical trade partners can be found on our website
www.ise.de

CONTACT

ise Individuelle Software und Elektronik GmbH
Osterstraße 15
26122 Oldenburg, Germany

Phone +49 441 680 06 0
Fax +49 441 680 06 10
E-mail info@ise.de



SUPPORT

Should you have any technical questions on products you have already purchased, please contact our support department from Monday through Friday from 08:30 a.m. to 4:30 p.m. or by e-mail.

Phone +49 441 680 06 12
Fax +49 441 680 06 15
E-mail support@ise.de



More information, technical documentation, data sheets, software, the latest firmware and much more can be found on our website under the corresponding products. If you can't find what you're looking for, please get in touch with us.

**UPDATES ENSURE
THE CONTINUOUS
IMPROVEMENT
OF OUR PRODUCTS.
PLEASE CHECK:
WWW.ISE.DE**

NEWS!
NEWS!
NEWS!
LETTER!
LETTER!
LETTER!









With the ise Newsletter you are up to date about new features and changes. Just subscribe to our newsletter on: **www.ise.de/en/newsletter**

Visit and subscribe us also on facebook:



@IndividuelleSoftwareundElektronikGmbH

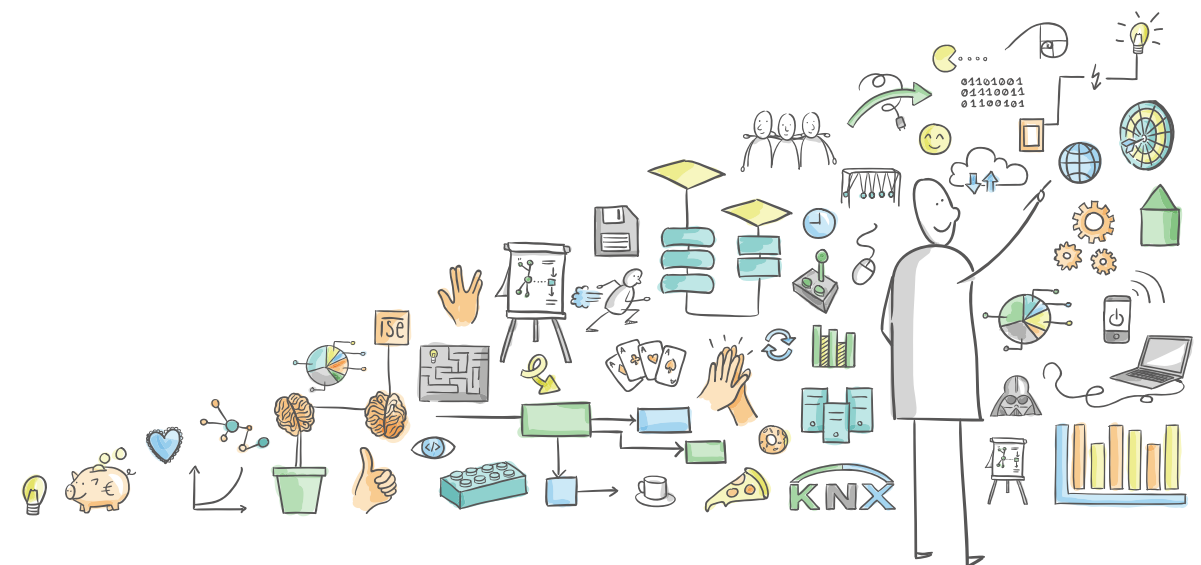

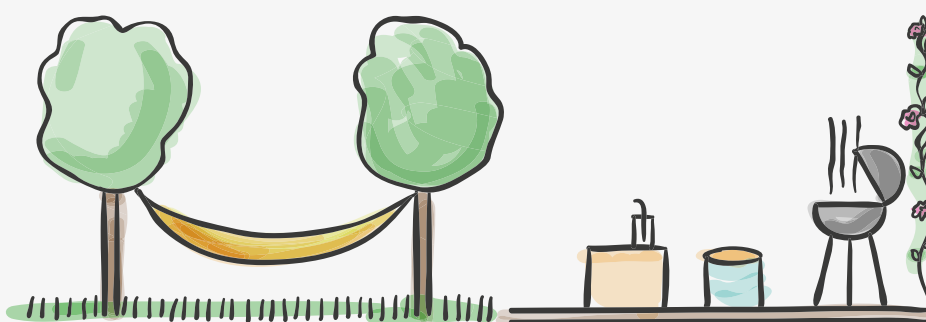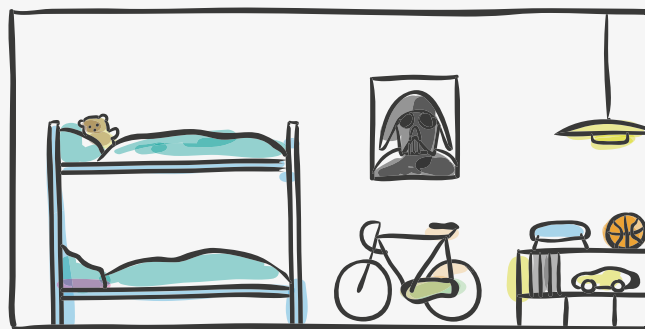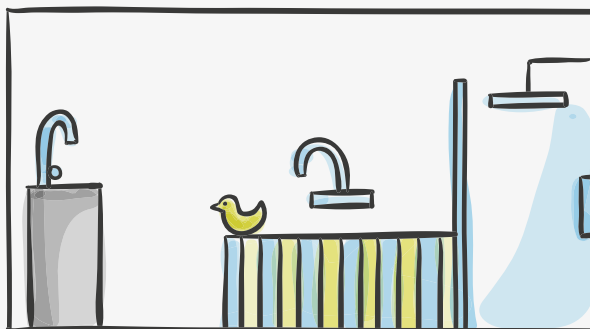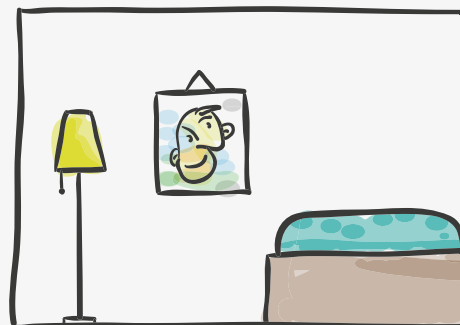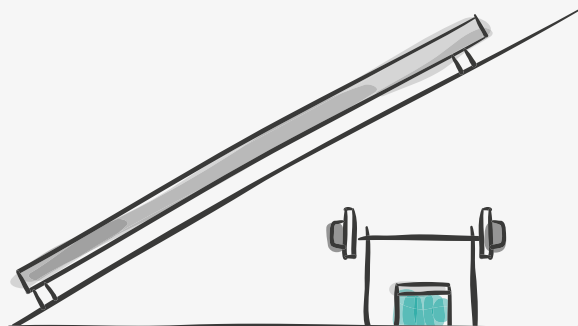

ise Individuelle Software und Elektronik GmbH
Osterstraße 15
26122 Oldenburg, Germany

Phone +49 441 680 06 11
Fax +49 441 680 06 15
E-mail sales@ise.de

